



ZetaLube

A New Lubricity Dimension
Evolved From Experience




ZetaLube

- 261 Long Term Rust Preventive
- 262 Quick Drying Rust Preventive
- 263 Water Based Rust Preventive

Description

ZetaLube 261, 262, and 263 are a range of oil-, solvent-, and water-based products engineered to provide exceptional protection to all metal parts against corrosion or rusting with minimal cost, minimum surface preparation, and incredibly easy removal.

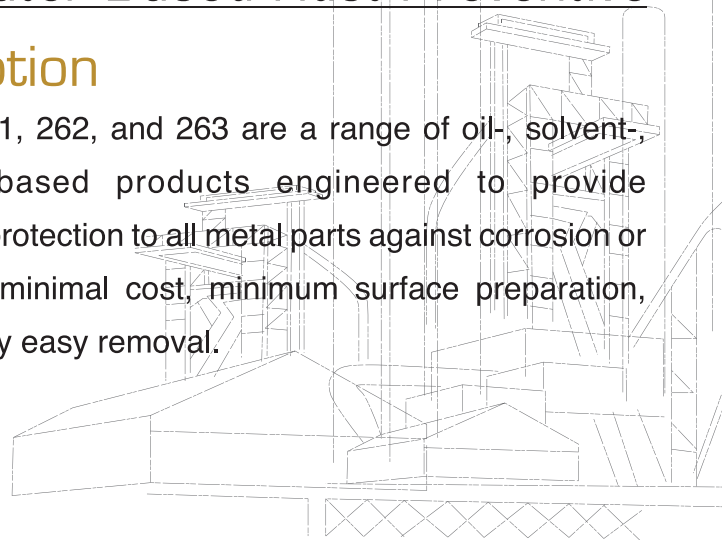

MAGNA INDUSTRIAL CO. LIMITED
Total Quality Maintenance

www.magnagroup.com

Magna Industrial reserves the right to modify or change this product for purpose of improving its performance characteristics ©2009 Magna Industrial Co. Limited.

The ZetaLube trade mark is the property of ITW, Inc. and is used under licence by Magna Industrial Co. Limited



Features and Benefits

ZetaLube 261 & ZetaLube 262

- Outstanding long-term rust prevention.
- Good water displacing capabilities – metal parts are water-proof.
- Outstanding penetrating capability to protect even difficult-to-reach metal parts.
- High flash point (>60°C).
- Easy to apply – manually by brush or by sprayer or dip feeding.
- No unpleasant or irritating odor.

ZetaLube 263

- Outstanding intermittent rust prevention(1 week to 1 month).
- Non-flammable
- Easy to remove
- Easy to apply – manually by brush or by sprayer or dip feeding.
- Apply by dilution with water at the ratio of 1 part ZL263 : 9 parts of water.
- Can also be applied without dilution with water.

Recommended Applications

- For intermittent and long-term protection against rusting, corrosion, and oxidation to all metal parts or components.
- For metal parts during indoor storage, packaged shipment, and inter-process handling.
- To maintain effectiveness of the products, ZetaLube Corrosion Preventive should be stored at room temperature (25°C).

Typical Data

TEST	ZetaLube 261	ZetaLube 262	ZetaLube 263
Colour	Brown	Amber	Light Amber
Density, kg/L @ 15°C	0.85	0.81	1.06
Flash Point (Close Cup), °C	>70	>60	--
Film Thickness (µm)	2.5	3.5	3.0
Coverage Area (m ² / L)	45	65	70
Drying Time (95% Solvent Evaporated)	--	30 minutes	30 minutes

The data shown is typical value and may vary.

Pack-size

205 Litre Metal Drum & 20 Litre Plastic Container

Authorized Distributor