




**ZetaLube**


A New Lubricity Dimension  
Evolved From Experience

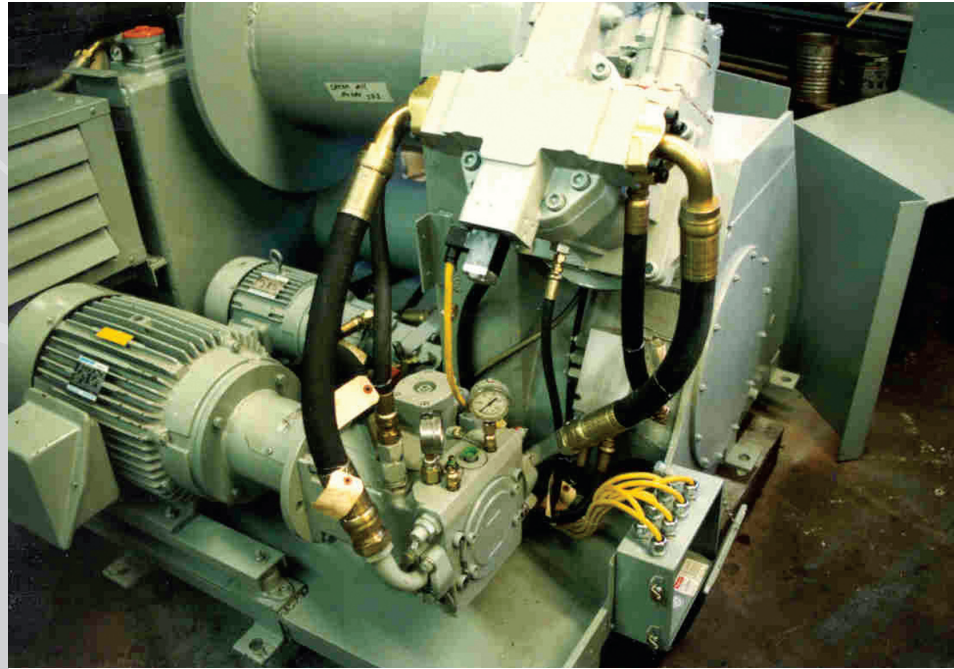

# ZetaLube 220 Anti-Wear Hydraulic Oil

## Description

ZetaLube 220 a is high quality mineral oil based, anti-wear hydraulic oil packed with additives suitable for lubrication of nearly all factory equipment. Available in a range of viscosity grades, ZetaLube 220 offers the maintenance professionals several oils for different operating conditions such as loads and temperatures.

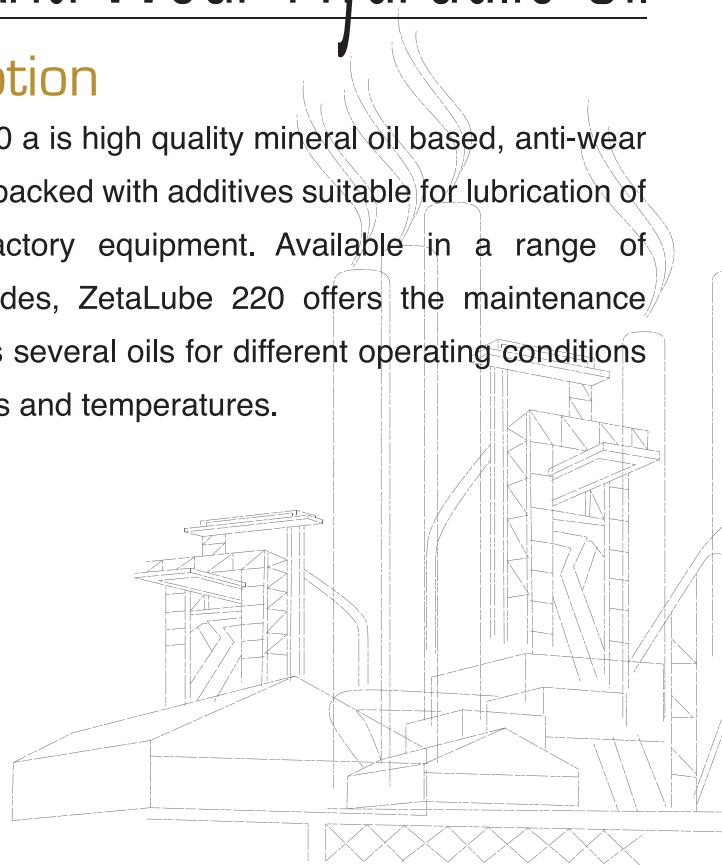

**MAGNA INDUSTRIAL CO. LIMITED**  
*Total Quality Maintenance*

[www.magnagroup.com](http://www.magnagroup.com)

Magna Industrial reserves the right to modify or change this product for purpose of improving its performance characteristics ©2009 Magna Industrial Co. Limited.

The ZetaLube trade mark is the property of ITW, Inc. and is used under licence by Magna Industrial Co. Limited



## Features and Benefits

- Excellent anti-wear characteristic to prevent load-carrying surfaces from excessive wear.
- Highly resistant to oxidation and corrosion, which extends service life of machinery and equipment.
- Anti-emulsifier to protect parts / components from water contamination which is one of the main causes of corrosion and is detrimental to performance of machinery/equipment.
- Proprietary additives to prevent foaming which is usually oxygen carrier under rigorous operating conditions.

## Recommended Applications

- Lubrication of machineries and equipment in every factory for better protection against wear, longer equipment service life and lower maintenance costs.
- For circulation systems composing of machineries/equipment and components such as pumps, electric motors, bearings and enclosed gears.
- For hydraulic equipment requiring load carrying and bearing lubricants.

## Typical Data

TEST	ASTM TEST METHOD	ISO VG 32	ISO VG 46	ISO VG 68
Colour	Visual	Amber	Amber	Amber
Density, kg/L @ 15°C	D-1298	0.872	0.880	0.887
Viscosity, cSt @ 40°C @ 100°C	D-445	32	46	68
	D-445	5.4	6.8	8.7
Viscosity Index	D-2270	103	101	100
Flash Point, COC, °C	D-92	225	230	243
Pour Point °C	D-97	-30	-27	-27
Total Acid Number, mg KOH/g	D-974	0.6	0.6	0.6
Carbon Residue, Conradson, %	D-524	0.02	0.02	0.03
Foaming Characteristics All Sequences, After Settling	D-892	Nil	Nil	Nil
Rust-Preventing Characteristics	D-665	Pass	Pass	Pass

The data shown is typical value and may vary.

## Pack-size

205 Litre Metal Drum & 20 Litre Plastic Container

Authorized Distributor